



# Austin-Healey 1958 BN6L Heat Profile


Driver Footwell Upper Section (Brake and clutch removed)

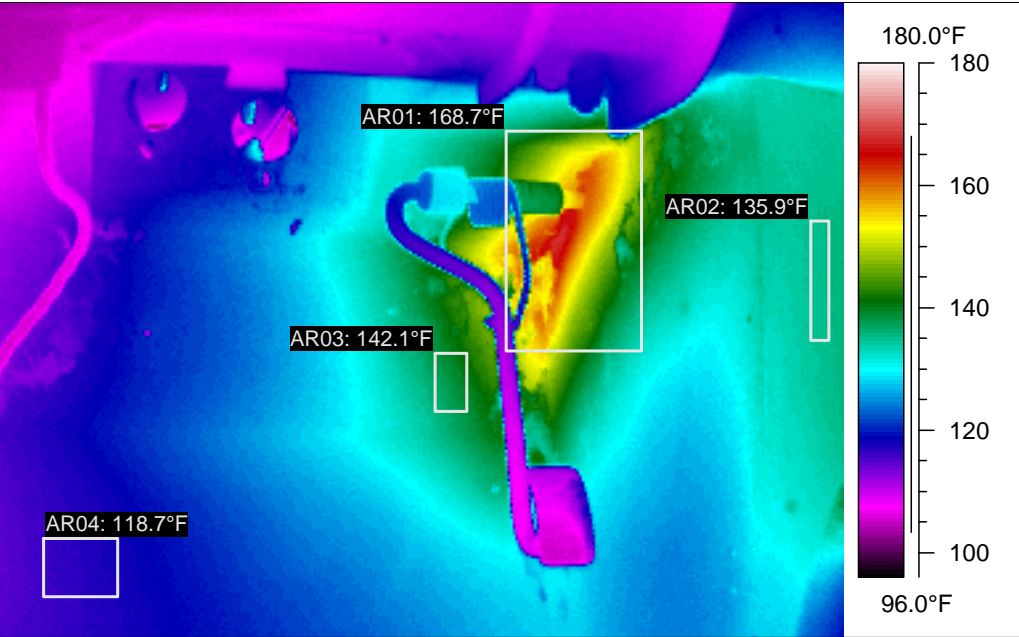

Drivers Seat Area

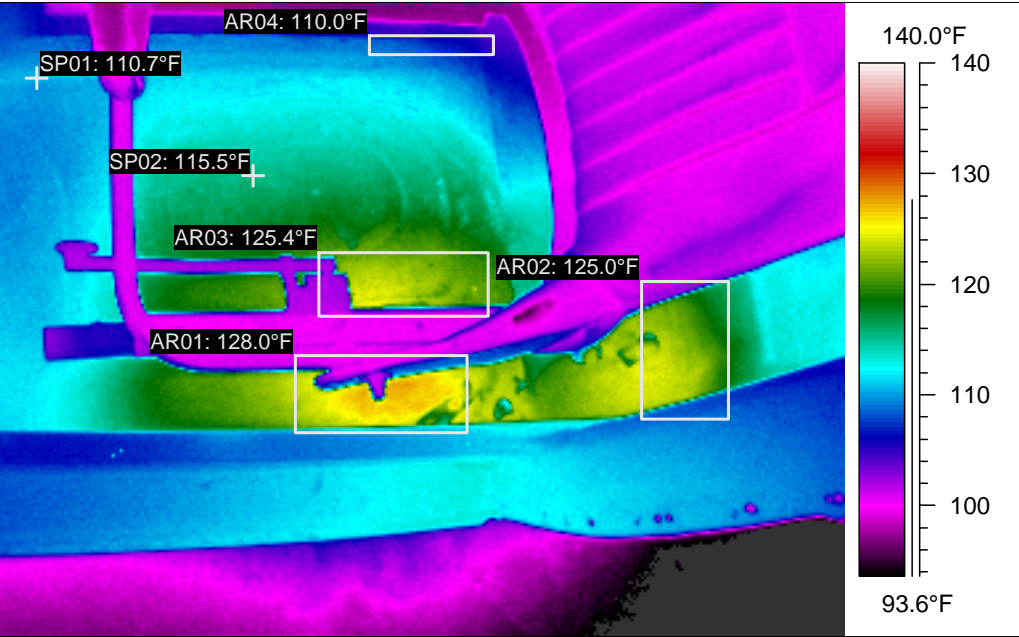

Driver Footwell Lower Section (Brake and clutch removed)

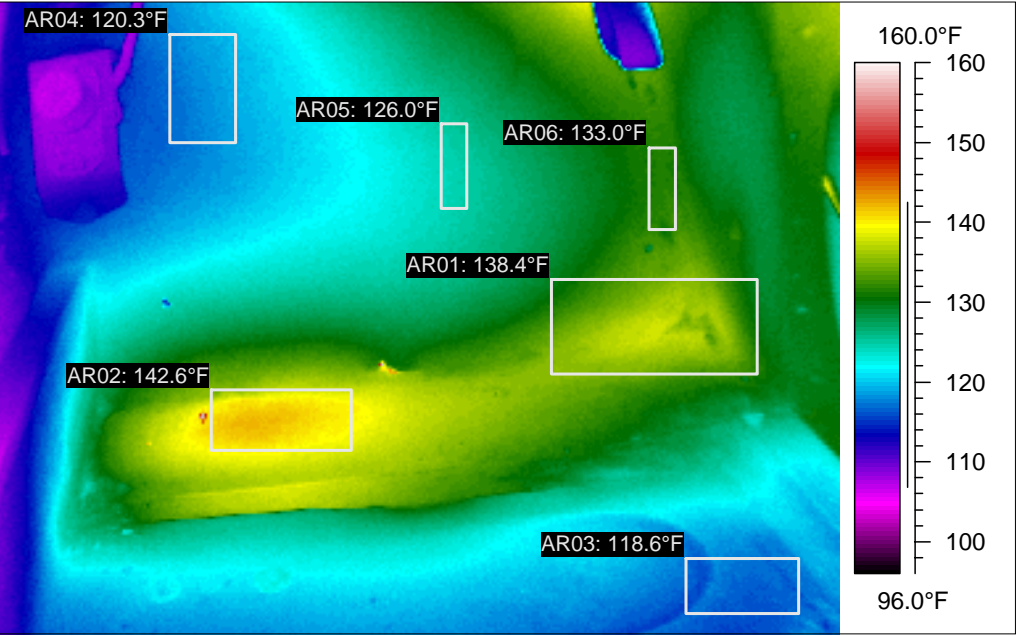

- Notes:**
1. Carpets removed, all floor insulation removed to bare metal.
  2. Standard stock asbestos heat shields in place, one additional shield under muffler.
  3. Car at operating temperature (195 F coolant temperature for 20 minutes)
  4. Measured maximum exhaust manifold temperature 525 F.